

TRUE FOOD SERVICE EQUIPMENT, INC.

St. Charles Industrial Center • P.O. Box 970 • O'Fallon, Missouri 63366 (636)240-2400 • FAX (636)272-2408 • (800)325-6152 • www.truemfg.com Parts Dept. (800)424-TRUE • Parts Dept. FAX# (636)272-9471 Location: _____ Qty: ____

Project Name: _____

Model #:	

______ SIS #

AIA #

Model: **GDM-33**

Glass Door Merchandiser: *Slide Door Refrigerator*



GDM-33

- The world's #1 manufacturer of glass door merchandisers.
- True's commitment to using the highest quality materials and oversized refrigeration systems provides the user with colder product temperatures, and lower utility costs in an attractive merchandiser that brilliantly displays packaged food and beverages.
- Oversized, factory balanced, refrigeration system holds 33°F to 38°F (.56°C to 3.33°C).
- Exterior non-peel or chip rosewood laminated vinyl; durable and permanent.
- Interior attractive, NSF approved, white aluminum interior liner with 300 series stainless steel floor.
- Self closing doors. Counter-balanced weight system for smooth, even positive closing.
- "Low-E", double pane thermal glass door assembly. The latest in energy efficient technology.
- Entire cabinet structure and solid doors are foamed-in-place using high density, CFC free, polyurethane insulation.

Bottom mounted units feature

- "No stoop" lower shelf to maximize product visibility.
- Storage on top of cabinet.
- Easily accessible condenser coil for cleaning.

ROUGH-IN DATA

Specifications subject to change without notice. Chart dimensions rounded up to the nearest 1/8" (millimeters rounded up to next whole number).

	Glass Front	Capacity (Cu. Ft.)	# of	Cabinet Dimensions (inches) (mm)						NEMA	Cord Length (total ft.)	Crated Weight (lbs.)
Model	Doors	(liters)	Shelves	L	D†	Н	HP	Voltage	Amps	Config.	(total m)	(kg)
GDM-33	2	33	8	39 1/2	29 5/8	78 5/8	1/2	115/60/1	9.2	5-15P	9	410
		935		1004	753	1998	1/2	230-240/50/1	5.0		2.74	186

† Depth does not include 3/8" (10 mm) for door handles

A Plug type varies by country.



Model:

GDM-33

Glass Door Merchandiser: Slide Door Refrigerator



STANDARD FEATURES

DESIGN


 True's commitment to using the highest quality materials and oversized refrigeration systems provides the user with colder product temperatures, and lower utility costs in an attractive merchandiser that brilliantly displays packaged food and beverages.

REFRIGERATION SYSTEM

- Factory engineered self-contained, capillary tube system using environmentally friendly (CFC free) 134A refrigerant.
- Extra large evaporator coil balanced with higher horsepower compressor and large condenser; maintains 33°F to 38°F (.56°C to 3.33°C).
- Sealed, cast iron, self-lubricating evaporator fan motors and larger fan blades give True merchandisers a superior low velocity, high volume airflow design. This unique design insures faster temperature pull down of warm product, colder holding temperatures and faster recovery in high use situations.
- Bottom mounted condensing unit positioned for easy maintenance. "No stoop" lower shelf maximizes visibility by raising merchandised product to higher level.

CABINET CONSTRUCTION

- Exterior non-peel or chip rosewood laminated vinyl; durable and permanent.
- Interior attractive, NSF approved, white aluminum liner with 300 series stainless steel floor.

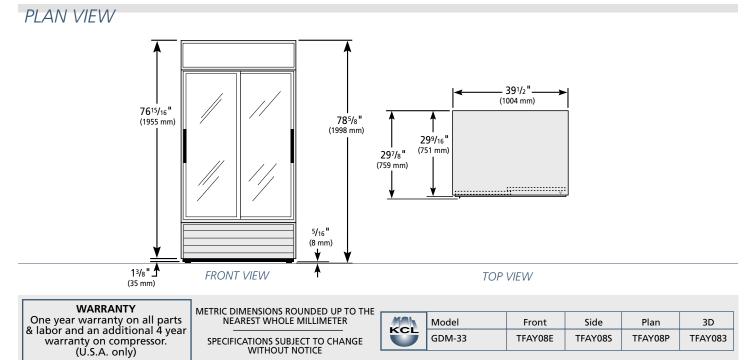

TRUE FOOD SERVICE EQUIPMENT

St. Charles Industrial Center • P.O. Box 970 • O'Fallon, Missouri 63366 • (636)240-2400 • FAX (636)272-2408 • (800)325-6152 • www.truemfg.com

- Insulation entire cabinet structure is foamed-in-place using high density, CFC free, polyurethane insulation.
- Cabinet mounted on a welded, heavy duty galvanized frame rail. Rail dipped in rust inhibiting enamel paint for corrosion protection. Rail fitted with leg levelers.
- Illuminated exterior sign panel. Variety of sign options available.

DOORS

- "Low-E", double pane thermal glass door assembly with mitered plastic channel frame. The latest in energy efficient technology.
- Self closing doors. Counter-balanced weight system for smooth, even positive closing.
- Doors fitted with 12" (305 mm) handles.
 SHELVING
- Eight (8) adjustable, heavy duty PVC coated wire shelves 17 1/4" x 20 9/16" (439 mm x 523 mm). Four (4) chrome plated shelf clips included per shelf.
- Shelf support pilasters made of same material as cabinet interior; shelves are adjustable on 1/2" (13 mm) increments.

LIGHTING

- Safety shielded fluorescent interior lighting.
- Cabinet lighting utilizes electronic ballast and T-8 bulbs for brighter illumination, longer bulb life and increased energy efficiency.

MODEL FEATURES

• Evaporator is epoxy coated to eliminate the potential of corrosion.

- See our website www.truemfg.com for latest color and sign offerings.
- Convenient clean-out drain built in cabinet floor.

ELECTRICAL

• Unit completely pre-wired at factory and ready for final connection to a 115/60/1 phase - 15 amp dedicated outlet. Cord and plug set included.



OPTIONAL FEATURES/ACCESSORIES

- 🗖 230 240V / 50 Hz.
- Black, white, walnut and stainless exterior.
 Black aluminum and stainless interior
- liners.
- □ Stainless steel or seismic legs.
- □ Castors.
- Red wine, chocolate or white wine thermostats.
- Barrel locks.
- □ Ratchet locks.
- □ TrueTracII (gravity feed organizers).
- □ TrueTrac4 (gravity feed organizers).
- Remote cabinets (condensing unit supplied by others), consult factory technical service department for BTU information.